

102


TENZAR®

Super Strength 1.0 Mil Backing

LOW NOISE

Professional Quality Oxide

Permanent Lubrication Splice Free Polyester

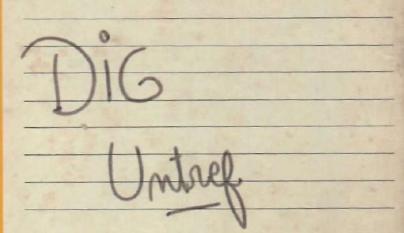
















9 1	+ / // //
tomb	uctri (Mali) 1974
the same of the sa	
	14-7-15 x 1-12-42-10 g) 25-73 (F) 35-35-35-35
	ASSISTANCE OF THE PROPERTY OF
THE PERSON NAMED IN COLUMN TWO IS A REAL PROPERTY.	
	ACCURATION OF THE PROPERTY OF THE PARTY OF T
KIND OF THE PROPERTY OF THE PARTY OF THE PAR	
THE RESERVANT OF THE PARTY OF T	
	The state of the s
The state of the s	

TIME	RECORDING BOTH DIRECTIONS							
CHART	150 FT.	300 FT.	600 FT.	900 FT.	1200 FT.	1800 FT.	2400 FT.	3600 FT.
1% IPS	30 min.	1hr.	2 hrs.	3 hrs.	4 hrs.	6 hrs.	8 hrs.	12 hrs.
3¾ IPS	15 min.	30 min.	60 min.	1½ hrs.	2 hrs.	3 hrs.	4 hrs.	6 hrs.
7½ IPS	7½ min.	15 min.	30 min.	45 min.	1 hr.	1½ hrs.	2 hrs.	3 hrs.



Important Notice to Purchaser — Manufacturer's only obligation shall be to replace such quantity of the product proved to be defective. User shall determine the suitability of the product for his

intended use, and assume all risk and liability in connection therewith.

MINNESOTA MINING & MFG. CO., ST. PAUL, MINN. 55101

THE TERMS "SCOTCH", "TENZAR" AND PLAID DESIGN ARE REGISTERED TRADEMARKS OF THE 3M COMPANY.